

# Wafer Check Valve Type 369



## General

- **Size:** 1½"–12"
- **Material:** PVC, PP, PVDF
- **Seals:** EPDM, FPM
- **Mounting:** Suitable for vertical and horizontal mounting
- **Connection:** Both ANSI 150 and DIN 2501

## Optional Features

- **Spring:** 316 SS or Hastelloy C
- **Cleaned:** Silicone free
- **Size:** 14"–24" available upon request
- **Seals:** Alternative materials available upon request

## Important Note


This is not a full port valve. Opening angle is between 70-90%.

## Sample Specification


The Type 369 Check Valve shall be of wafer style, compatible with both flat and serrated flange adapters and suitable for both vertical and horizontal mounting. The face seal shall be a Q-ring and the port seal shall be an O-ring. The body shall be machined and the disk shall be molded. The alignment eye bolt shall be 304 stainless steel. All valves shall be tested in accordance to ISO9393 and designed to ISO16137 standards. All valves shall be manufactured under ISO9001 for Quality and ISO14001 for Environmental Management.

# Technical Data

## Flange Assembly

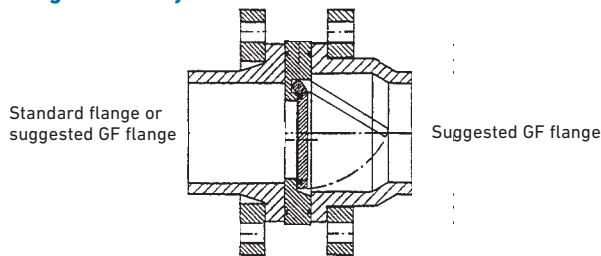

## Pressure/Temperature diagram

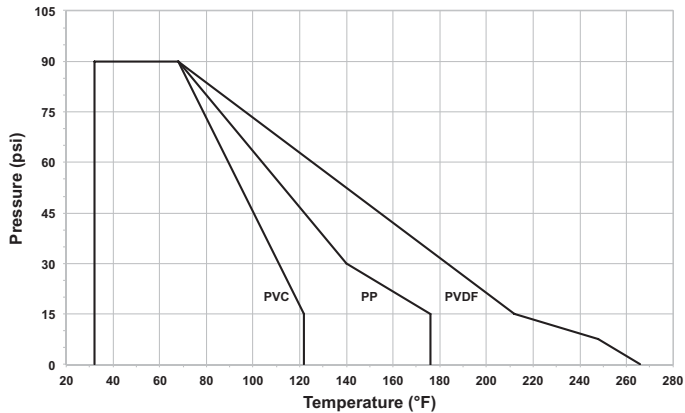

## Important Installation Instructions

- A stabilizing zone of at least 5 times nominal diameter should be provided before and after the wafer check valve
- For sizes 3" and below use the next larger flange size (i.e. 2" valves require a 2½" flange)
- Direct installation on pump flange or bend not recommended
- Wafer check valves without a spring are not recommended for pulsating flows

## Cv Value

Size (inch)	Cv (gal/min)		
	PVC	PP	PVDF
1½	25.9	23.8	23.8
2	63.0	42.7	42.7
2½	79.8	86.1	86.1
3	130.9	182.7	182.7
4	200.9	275.1	275.1
5	399.0	498.4	498.4
6	483.0	642.6	642.6
8	1316.0	1232.0	1232.0
10	1750.0	1708.0	1708.0
12	1932.0	2233.0	2233.0

## Cracking Pressure (psi)


Size (inch)	d (mm)	Vertical w/o spring	Vertical w/ spring	Horiz. w/o spring	Horiz. w/ spring
1½	50	0.15	0.44	0.01	0.29
2	63	0.15	0.44	0.01	0.29
2½	75	0.15	0.44	0.01	0.29
3	90	0.15	0.44	0.01	0.29
4	110	0.15	0.44	0.01	0.29
6	160	0.15	0.44	0.01	0.29
8	225	0.26	0.55	0.01	0.29
10	280	0.26	0.55	0.01	0.29
12	315	0.26	0.55	0.01	0.29

## Sealing Pressure (psi)

PVC	PP/PVDF
2.8	4.3
2.8	4.3
2.8	4.3
2.8	4.3
2.8	4.3
2.8	4.3
2.8	4.3
2.8	4.3
2.8	4.3

# Dimensions

The following tables are shown in millimeters unless otherwise specified



Size (inch)	d (mm)	D	D1	D2	L	L1	H
1½	50	95	72	22	16	27	28
2	63	109	86	32	18	40	29
2½	75	129	105	40	20	55	31
3	90	144	119	54	20	67	32
4	110	164	146	70	23	67	31
6	160	220	197	105	26	100	41
8	225	275	255	154	35	152	38
10	280	330	312	192	40	180	41
12	315	380	363	227	45	215	41